

TANNOY HTS HOME THEATRE SYSTEM

HTS 200™

If both movies and music is your passion you really should consider the HTS 200. This package would definitely be the natural choice for larger rooms, where the fuller acoustic benefits of the floor standing tower speakers across the front soundstage will be fully appreciated. Their twin 75m (3") mid bass and 19mm (¾") wide bandwidth high frequency driver array certainly packs an extra punch.

Partnered with the centre channel and active subwoofer the complete system delivers accurate and dynamic mid and high frequency combined with rich and powerful bass. This clean and natural acoustic balance ensures that movie soundtracks are delivered with scale and impact while the musical agility, subtlety and detail accuracy essential for the accurate reproduction of audio recordings are satisfyingly presented.



| SATELLITE SPEAKER | |
|--------------------------------------|--|
| Recommended amplifier power | 25 - 100 Watts |
| Maximum Sensitivity (2.83Volts @ 1m) | 87dB |
| Nominal impedance | Satellite 6 ohm |
| Frequency response (-6dB) | 100Hz to 40kHz (Centre & Satellites) |
| Drivers | HF: 19mm (3/4inch) titanium WideBand™ dome, with neodymium magnet system LF: 75mm (3 inch) paper cone |
| Crossover frequency | 3kHz (LF to HF) |
| Satellite Weight | 1.3KG (2.9lbs) |
| Satellite Dimensions H x W x D | 162 x 120 x 170mm (6.4 x 4.7 x 6.7 inches) |
| Supplied accessories | Satellite wall brackets / 20metres (65 ft) speaker cable |
| Optional accessories | Satellite floor stands with mounting brackets available in black finish |

| CENTRE SPEAKER | |
|--------------------------------------|--|
| Recommended amplifier power | 25 - 100 Watts |
| Maximum Sensitivity (2.83Volts @ 1m) | 87dB |
| Nominal impedance | Centre 8 ohm |
| Frequency response (-6dB) | 100Hz to 40kHz (Centre & Satellites) |
| Drivers | HF: 19mm (3/4inch) titanium WideBand™ dome, with neodymium magnet system 2 x LF: 75mm (3 inch) paper cone |
| Crossover frequency | 3kHz (LF to HF) |
| Centre Weight | 2.7KG (5.9lbs) |
| Centre Dimensions H x W x D | 120 x 355 x 170mm (4.7 x 14 x 6.7 inches) |
| Supplied accessories | Centre support platform / 20metres (65 ft) speaker cable |
| Optional accessories | Satellite floor stands with mounting brackets available in black finish |

| TOWER SPEAKER | |
|--------------------------------------|--|
| Recommended amplifier power | 25 - 100 Watts |
| Maximum Sensitivity (2.83Volts @ 1m) | 88dB |
| Nominal impedance | 6 ohm |
| Frequency response (-6dB) | 80Hz to 40kHz |
| Drivers | HF: 19mm (3/4inch) titanium WideBand™ dome, with neodymium magnet system 2 x LF: 75mm (3 inch) paper cone |
| Crossover frequency | 3kHz (LF to HF) |
| Tower Weight | 5.8KG (12.8lbs) |
| Tower Dimensions H x W x D | 940 x 120 x 170mm (37 x 4.7 x 6.7 inches) |
| Supplied accessories | Adjustable coupling spikes and wood floor protectors |

| SUBWOOFER | |
|---------------------------|--|
| Power output | 100 Watts |
| Frequency response (-6dB) | 29Hz - 200Hz |
| Crossover frequency | 50Hz to 200Hz variable control |
| Driver | 200mm (8 inch) paper cone, long throw |
| Inputs | Line Input (LFE RCA/Phono) or Left & Right speaker level input. |
| Power requirements | 115 or 230V AC / 50 - 60 Hz, switching facility on amplifier panel, 60VA |
| Fuse ratings | AC 100-120V/60Hz - Fuse: T1.6A L /125V / AC 220-240V/50Hz - Fuse: T800mA L /250V |
| Additional features | Energy saving AUTO power function Switchable phase 0 or 180 degrees Crossover and Volume control |
| Weight | 10.2KG (22.4lbs) |
| Dimensions H x W x D | 420 x 275 x 405mm (16.5 x 10.8 x 16 inches) |
| Supplied accessories | Port tube air flow modifier / Country specific mains cable (cord) |

Satellites, centre channel, tower speakers and subwoofer are supplied in a cherry finish
Satellites, centre channel and tower speakers all have magnetic shielding

TANNOY®

HTS HOME THEATRE SYSTEMS

Tannoy adopts a policy of continuous improvement and product specification is subject to change.

Tannoy United Kingdom T: +44 (0) 1236 420199 F: +44 (0) 1236 428230 E: enquiries@tannoy.com
Tannoy North America T: (519) 745 1158 F: (519) 745 2364 E: inquiries@tannoy.com
Tannoy Deutschland T: 0180 1111 88 1 F: 0180 1111 88 2 E: info@tannoy.com

tannoy.com


6483 0976

TANNOY®



HTS HOME THEATRE SYSTEMS

STYLISH DESIGN ...GREAT SOUND ...HOME THEATRE MADE EASY

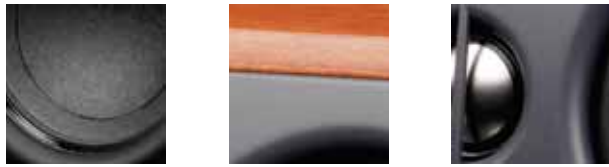

STYLISH DESIGNGREAT SOUND ...HOME THEATRE MADE EASY

Tannoy HTS offers terrific value hassle-free home theatre. Two straight-forward options, each providing outstanding performance and appeal, make it easy to choose which suits you best!

Slim and stylish, the cherry finish contoured wooden cabinets of Tannoy HTS are designed to blend unobtrusively with contemporary décor. Yet these compact 5.1 home theatre systems still have what it takes to deliver class-leading performance.

HTS 100™

The HTS 100 is a discreet, exceptionally compact wall or shelf mount system ideal for smaller spaces. The satellites utilise a 75mm (3") mid bass driver and a 19mm (¾") Tannoy WideBand™ extended bandwidth high frequency unit with a frequency range from 100Hz to 40kHz. Housed in a rigid wooden enclosure they integrate superbly with the centre channel and 200mm (8") active subwoofer to deliver a convincing, high-energy movie experience.



HTS 200™

THE HTS200 HOME THEATRE SYSTEM

TWO SATELLITE SPEAKERS // CENTRE CHANNEL // TWO TOWER SPEAKERS // 100W ACTIVE SUBWOOFER